

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/GB05/000986

International filing date: 16 March 2005 (16.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: GB  
Number: 0406762.5  
Filing date: 25 March 2004 (25.03.2004)

Date of receipt at the International Bureau: 22 September 2005 (22.09.2005)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse



PCT/GB2005/000986.



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

*Stephen Hordley*

Dated

12 September 2005



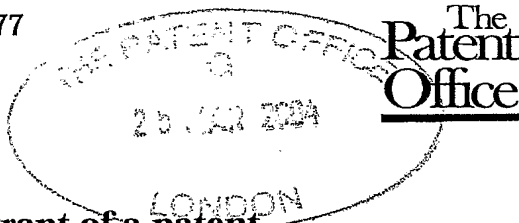

26MAR04 EBB4038-7 000056  
POL/7700 0.00-0406762.5 CHEQUE

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference NRJ/P36543GB

2. Patent application number  
(The Patent Office will fill in this part)

0406762.5

25 MAR 2004

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Carbonite Corporation,  
Eldorado Building, Elvira Mendez,  
57 Street, P.O. Box 1358,  
Panama City, Panama.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

Panama

8837304001

4. Title of the invention

BEVERAGE CONTAINERS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Kilburn & Strode  
20 Red Lion Street  
London  
WC1R 4PJ

Patents ADP number (if you know it)

125001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

YES

## Patents Form 1/77


9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 11

Claim(s) 2

Abstract

Drawing(s) 2 + 2 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)


Request for preliminary examination and search (*Patents Form 9/77*) 1

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature



Date 25 March 2004

12. Name and daytime telephone number of person to contact in the United Kingdom

Mr. N.R. Jennings  
Tel: 020 7539 4200

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*

BEVERAGE CONTAINERS

5 The present invention relates to containers for beverages, particularly carbonated beverages, and is concerned in particular with such containers with wide mouths, that is to say with a diameter in excess of about 25mm, preferably about 38mm, more particularly 45mm.

10 Beverage bottles typically have a narrow mouth with a diameter in the region of only 28mm or less. Numerous ways of sealing the bottle top to the neck of the bottle are known but it will be appreciated that the problem of producing a seal on a container for a carbonated beverage increases exponentially as the diameter of the mouth increases because the area of the underside of the cap or top increases in accordance with the square of the radius. If the container cap or  
15 its seal should fail, the gas pressure will be released and the cap may even be projected explosively into the air with the resultant loss of the beverage and potential injury to bystanders. Similar sealing problems can arise also with uncarbonated beverages because if the container is subjected to an elevated temperature, e.g. it is exposed to direct sunlight, the gas pressure in the head  
20 space of the container will increase and if the container is inadequately sealed this will result in the leakage of gas to the atmosphere. This is not of itself inherently problematic, but when the container cools again, a subatmospheric pressure may be produced in the head space which results in the induction of atmospheric oxygen. This can result in oxidation of the container contents  
25 rendering them undrinkable.

The use of wide mouthed beverage containers is rapidly becoming more

widespread and it is the object of the invention to provide such a container with a reliably sealed lid which can contain the pressure generated by a carbonated beverage or generated under high ambient temperature conditions in the head space of a container containing an uncarbonated beverage or foodstuff but  
5 which can nevertheless be rapidly and simply removed, when required.

According to the present invention, a beverage container, particularly for carbonated beverages, comprises a receptacle which has a central axis and is sealed by a lid of resilient material, the receptacle including a neck defining an  
10 opening and the lid including a closure plate, integral with which is a depending skirt extending around the outer surface of the neck, the inner surface of the skirt carrying a continuous annular flange, the free end of which is in sealing engagement with the underside of a continuous downwardly directed annular  
15 shoulder on the outer surface of the neck and thus prevents movement of the lid in the axial direction away from the receptacle, the annular flange on the lid being connected thereto by a resilient connection, the resilience of which urges the free end of the annular flange into sealing engagement with the external surface of the neck.

20 Thus the lid is retained on the receptacle by an annular flange which is integral with the inner surface of the skirt and which preferably extends substantially parallel to the skirt, the free end of which engages the underside of a shoulder on the neck of the bottle. This engagement not only prevents movement of the lid and the receptacle away from one another but also constitutes a gas seal.  
25 The resilience of the connection between the annular flange and the skirt urges the flange inwardly into engagement with the outer surface of the neck under a contact pressure. A further seal is thus formed.

The gas seal between the end of the annular flange and the underside of the shoulder is maintained in practice as a result of the fact that the skirt is in tension, which draws the free end of the flange into contact with the underside of the annular shoulder. The necessary reactive force is provided by engagement of the underside of the lid with the upper surface of the neck. If, as is preferred, this upper surface is smooth and continuous, then it is preferred that the closure plate is downwardly concave and thus extends into the neck and includes a base portion, integral with which is an upwardly extending wall portion, which is connected to the annular skirt by an annular web, the underside of which extends over the upper surface of the neck and is retained in sealing engagement with it.

In order to maintain the integrity of the gas seal between the underside of the web and the upper surface of the rim, the annular skirt is preferably stressed in tension by the method by which the cap is applied to the bottle, as will be discussed below. This tension draws the underside of the web into sealed engagement with the upper surface of the neck and also draws the free end of the annular flange on the lid into sealing engagement with the downwardly directed annular shoulder on the outer surface of the neck. The seal between the underside of the web and the upper surface of the neck is sufficient to retain a relatively high pressure within the bottle but if this pressure should rise to an unusually high level or if the lid should be deformed by the application of an external force, pressurised gas may flow past this seal and into the space defined by the exterior of the neck of the bottle, the dependent skirt and the annular flange connected to the skirt. This pressure will act on the flange and force it inwardly, that is to say towards the external surface of the neck, thereby



increasing the contact pressure between the flange and the external surface of the neck and thus increasing the integrity of the further gas seal between these components.

5 In order that the lid may be readily removed from the bottle, when desired, it is preferred that the resilient connection of the annular flange to the skirt is readily tearable. It is also preferred that the lid is snap-fitted on the receptacle. In order to facilitate removal of the cap, it is preferred that it includes a rupture tab connected to the annular web, rotation of which causes the seal of the container  
10 to be broken and the snap-fit connection to be released.

Thus the container in accordance with the invention has a first gas seal between the free end of the annular flange connected to the skirt and the downwardly directed surface on the shoulder of the exterior of the rim and a second gas seal  
15 between the free end of the annular flange and the external surface of the rim and preferably also a third gas seal between the underside of the lid, that is to say the underside of the web which connects the closure plate to the annular skirt, and the upper surface of the rim. If yet a further gas seal is thought to be necessary or desirable, the bottle and cap may be so constructed and  
20 dimensioned that the inner surface of the neck constitutes a first annular sealing surface and the outer surface of the wall portion of the closure plate constitutes a second sealing surface which is opposed to and in sealing engagement with the first sealing surface. It is preferred in this event that the base portion of the closure plate is downwardly concave. In the event of a gas pressure being  
25 generated in the head space of the container, the concave portion of the lid will be deformed upwardly and this will inherently result in a force acting on that portion of the lid which affords the second sealing surface, which urges it

against the corresponding first sealing surface on the neck of the receptacle. Accordingly, as the gas pressure rises in the receptacle, the integrity or sealing ability of this further gas seal increases also.

5 The first sealing surface may be inclined upwardly and outwardly with respect to the axis but alternatively or additionally, one of the first and second sealing surfaces may carry an annular protuberance which is accommodated within an annular recess on the other of the first and second sealing surfaces. The provision of such a mating protuberance and recess means that if the closure  
10 plate of the cap should move upwardly with respect to the receptacle, the contact pressure of a portion of the protuberance with a portion of the surface of the recess will increase, thereby increasing its sealing integrity.

Further features and details of the invention will be apparent from the following  
15 description of two specific embodiments which is given by way of example only with reference to the accompanying diagrammatic drawings, in which:

Figure 1 is a vertical sectional view of a first embodiment of a beverage bottle in accordance with the invention with the lid in an intermediate position whilst  
20 being applied to the bottle;

Figure 2 is a vertical sectional view of the container lid before application to the bottle;

25 Figure 3 is a scrap sectional view of the upper portion of the bottle showing the lid in the applied and sealed position;

Figure 4 is a side view of the upper portion of the bottle as seen in Figure 3;

Figure 5 is a scrap view from below of part of the lid showing the rupturing tab;  
and

Figure 6 is a scrap view of the lid and bottle in accordance with a second embodiment.

As seen in Figure 1, the bottle 2 is of generally cylindrical shape with an axis 3  
and at least one portion 4 of increased size whose diameter is greater than that  
of the lid 6, for reasons which will be explained below. The bottle is in this  
case moulded from plastic material and it has a wide mouth, with a diameter of  
greater than 28mm defined by the neck 8 of the bottle. The neck 8 terminates at  
a rim portion which is defined by an internal surface 10, which is inclined  
upwardly and outwardly with respect to the axis 3, and an external surface 12,  
which is inclined upwardly and inwardly with respect to the axis 3. The  
surfaces 10 and 12 thus converge and the external diameter of the bottle,  
specifically of its rim portion, thus initially increases from the top downwards.  
However, it then decreases abruptly at a downwardly directed annular shoulder  
14 extending substantially perpendicular to the axis 3. The internal diameter of  
the rim portion, however, initially decreases from the top downwards.

As best seen in Figure 2, the lid comprises a one-piece component, preferably  
integrally moulded from resilient plastic material, such as polypropylene. It  
comprises a shaped closure plate integral with which is a web 16 which extends,  
when the lid is connected to the bottle, over the rim of the bottle. Integral with  
the web 16 is a depending skirt 18, which extends downwardly around the

exterior of the upper portion of the bottle. Integrally connected to the lower edge of the skirt 18 or to the inner surface of the skirt at a position adjacent its lower edge is an annular retaining flange 20. The flange 20 is connected to the skirt 18 by a resilient connecting web 22, which is of reduced thickness and thus constitutes an annular line of weakness or predetermined breaking point. Connected to the lid at one circumferential position is a rupturing tab 24 which extends downwardly below the lower edge of the skirt 18. This tab is connected to the skirt 18 at its side by two lines of weakness 26, i.e. regions of reduced thickness.

The closure plate of the lid is concave and thus extends into the neck of the bottle, when it is connected to the bottle. The closure plate comprises a wall portion 30 which extends generally downwardly and inwardly and merges at its lower edge with a base portion 32, which is downwardly accurate, that is to say is of downwardly curved convex shape.

The lid is shown in Figure 2 in the configuration in which it is moulded. In this configuration, the flange 20 extends downwardly and inwardly and the diameter of its lower edge is less than that of the upper edge of the rim of the bottle whilst the diameter of its upper edge is greater than that of the upper edge of the rim of the bottle.

The lid is fastened and sealed to the bottle by a simple snap-fit procedure. This is effected simply by lowering the lid into the rim of the bottle and then applying pressure. As the lid is lowered, the lower edge of the flange 20 comes into contact with the rim. This causes the flange to rotate inwardly about the web 22. As downward movement of the lid continues, the flange 20 moves

downwardly in contact with the surface 12, as shown in Figure 1; and the increasing diameter of this surface in the downward direction results in the rotation of the flange continuing, thus moving it ever closer to the inner surface of the skirt 18. The underside of the web 16 then contacts the upper surface of the rim of the bottle. However, the pressure on the cap is maintained and this results in slight deformation of the web 16. The cap and bottle are so dimensioned that the slight further downward movement of the cap caused by the deformation of the web 16, is sufficient to permit the free end of the flange 20 to move past the shoulder 14. It is then rotated in the opposition direction, i.e. inwardly, by the resilience of the web 22 and thus becomes locked behind the shoulder, as shown in Figure 3. The lid is now retained in position on the bottle and cannot be removed without damaging or deforming it. The tension maintains the underside of the web 16 in engagement with the upper surface of the rim with a contact pressure sufficient to ensure that a first gas seal is formed along the annular line of contact. The tension in the skirt 18 also maintains the free end of the flange 20 in engagement with the surface of the shoulder 14 with a contact pressure sufficient to ensure that a second gas seal is formed along the annular line of contact. Furthermore, the resilience of the connecting web 22 forces the side surface of the free end of the flange 20 into contact with the side surface of the bottle and the contact pressure is preferably sufficient to form a third gas seal. The integrity of the first gas seal may be further enhanced, if required, by the provision of an annular bead or flange 17, which is shown in phantom lines in Figure 2 and which will engage the upper or side surface of the rim of the bottle and constitute an additional lip seal. If the pressure in the bottle should rise to a high value sufficient to deform the cap away from the rim of the bottle, thereby breaking the first gas seal; pressurised gas will flow into the space defined by the outer surface of the rim, the skirt 18

and the flange 20. This pressure will act on the flange 20 to press it yet more firmly against the side surface of the rim, thereby increasing the integrity of the third gas seal.

5 If yet further sealing integrity is required, yet a further gas seal may be provided, as in the illustrated embodiment, between the surface 10 of the rim and the outer surface 34 of the wall portion 30. Thus in this embodiment, these two surfaces are formed as complementary sealing surfaces in sealing engagement with one another. If the pressure in the bottle should become  
10 super-atmospheric, either as a result of the liberation of carbon dioxide from a carbonated beverage or as a result of the expansion of gas in the head space of the bottle due to an increase in temperature, the centre of the concave base portion 32 will be deformed upwardly and this will inherently result in the outer edge of the base portion 32 and thus the lower edge of the wall portion 30  
15 moving slightly outwards. This will result in an increase in the contact pressure between the sealing surfaces 12 and 34 and thus in an enhancement to the integrity of this further gas seal. The beverage container in accordance with the invention therefore not only has both primary and secondary gas seals but also has a further gas seal. The integrity or sealing ability of this further seal  
20 increases as the gas pressure within the container increases.

When it is desired to open the bottle, the user merely grasps the lower edge of the rupture tab 24 and pulls it outwardly. The lines of weakness 26 immediately rupture or stretch and the upper edge of the tab 24, which is  
25 connected to the web 16, rotates, thereby breaking the second and third gas seals. This rotation is transmitted to the web 16, which thus moves away from the rim of the bottle, thus breaking the first gas seal. This movement of the web

16 also causes the sealing surfaces 12 and 34 locally to move apart, thereby also breaking the further gas seal. The container is thus depressurised. The outward movement of the tab 24 initiates tearing of the thin connecting web 22, and once tearing has started it is a simple matter to keep it going by exerting upward and outward pressure on the tab 24 until the lid is completely disconnected from the flange 20, which remains in position around the neck of the bottle. The lid may now be discarded and the contents of the bottle dispensed or drunk.

As mentioned above, the body of the bottle has one or more protuberances 4 whose contour extends beyond that of the lid, when viewed in the axial direction. This means that when a number of such bottles are packaged together side by side, they will contact one another only at the protuberances and the lids of adjacent bottles will not contact one another, thereby eliminating the risk that the lids may inadvertently become dislodged, thereby venting the interior of the associated containers. The base of the bottle also has a shape which is complementary to that of the upper surface of the lid so that bottles may be simply and securely stacked on top of one another.

In the modified embodiment illustrated in Figure 6, the outer surface of the wall portion 30 carries an annular protuberance 40, which engages the surface of a recess in the internal surface of the rim. If the gas pressure within the bottle should increase to a level sufficient to deform the lid upwardly to an extent sufficient to break the first gas seal, as is illustrated, the contact pressure of the upper portion of the protuberance with the surface of the recess will be increased, thereby increasing the integrity of the further gas seal, and compensate for the loss of the first gas seal. The protuberance could also be carried by the inner surface of the rim, in which case the recess will be formed

in the wall portion 30. If the gas pressure in the container should increase substantially, it will be the contact pressure of the lower portion of the protuberance which will increase.

- 5     Although the container of the present invention is intended primarily for beverages, i.e. for liquids that are intended to be drunk, it will be appreciated that it will be equally applicable to other flowable foodstuffs, such as yoghurt and the term "beverage" is to be interpreted accordingly.








CLAIMS

1. A beverage container comprising a receptacle which has a central axis  
5 and is sealed by a lid of resilient material, the receptacle including a neck  
defining an opening and the lid including a closure plate, integral with  
which is a depending skirt extending around the outer surface of the  
neck, the inner surface of the skirt carrying a continuous annular flange,  
the free end of which is in sealing engagement with the underside of a  
10 continuous downwardly directed annular shoulder on the outer surface of  
the neck and thus prevents movement of the lid in the axial direction  
away from the receptacle, the annular flange on the lid being connected  
thereto by a resilient connection, the resilience of which urges the free  
end of the annular flange into sealing engagement with the external  
15 surface of the neck.
2. A container as claimed in Claim 1 in which the closure plate is  
downwardly concave and thus extends into the neck and includes a base  
portion, integral with which is an upwardly extending wall portion,  
20 which is connected to the annular skirt by an annular web, the underside  
of which extends over the upper surface of the neck and is retained in  
sealing engagement with it.
3. A container as claimed in Claim 1 in which the resilient connection is  
25 readily tearable.
4. A container as claimed in any one of the preceding claims in which the

lid is snap-fitted on the receptacle.

5. A container as claimed in claim 4 including a rupture tab connected to the annular web, rotation of which causes the seal of the container to be broken and the snap-fit connection to be released.  
5
6. A container as claimed in any one of the preceding claims in which the inner surface of the neck affords a first annular sealing surface and the outer surface of the wall portion of the closure plate affords a second sealing surface which is opposed to and in sealing engagement with the first sealing surface.  
10
7. A container as claimed in claim 6 in which the base portion of the closure plate is downwardly concave.  
15
8. A container as claimed in claim 6 or 7 in which the first sealing surface is inclined upwardly and outwardly with respect to the axis.
9. A container as claimed in claims 6 or 7 in which one of the first and second sealing surfaces carries an annular protuberance which is accommodated within an annular recess in the other of the first and second sealing surfaces.  
20



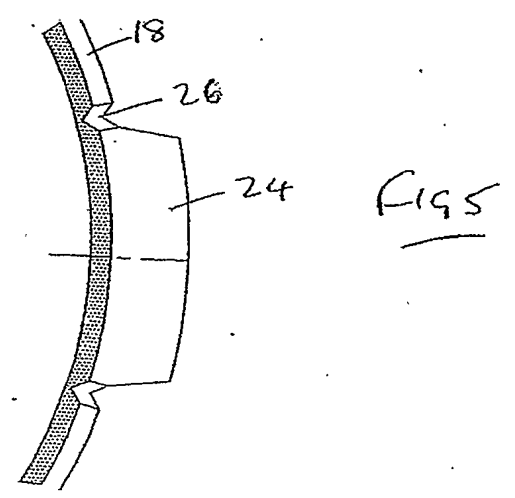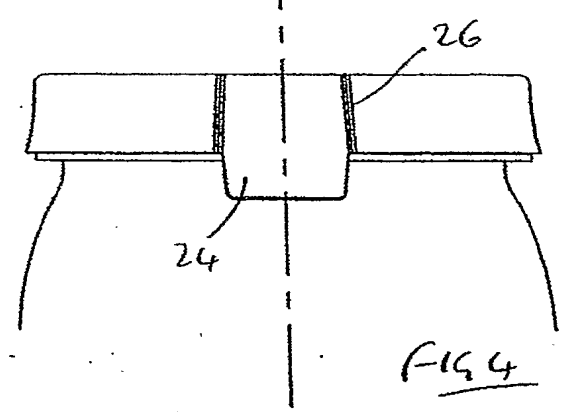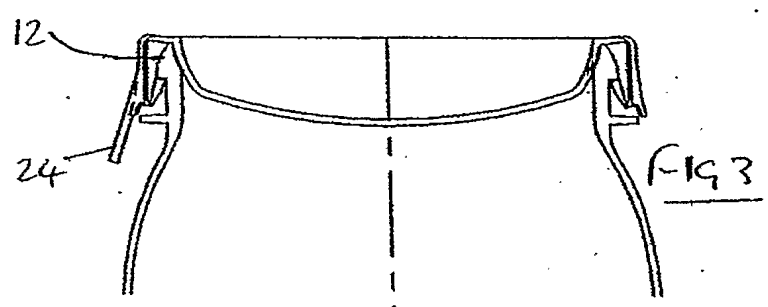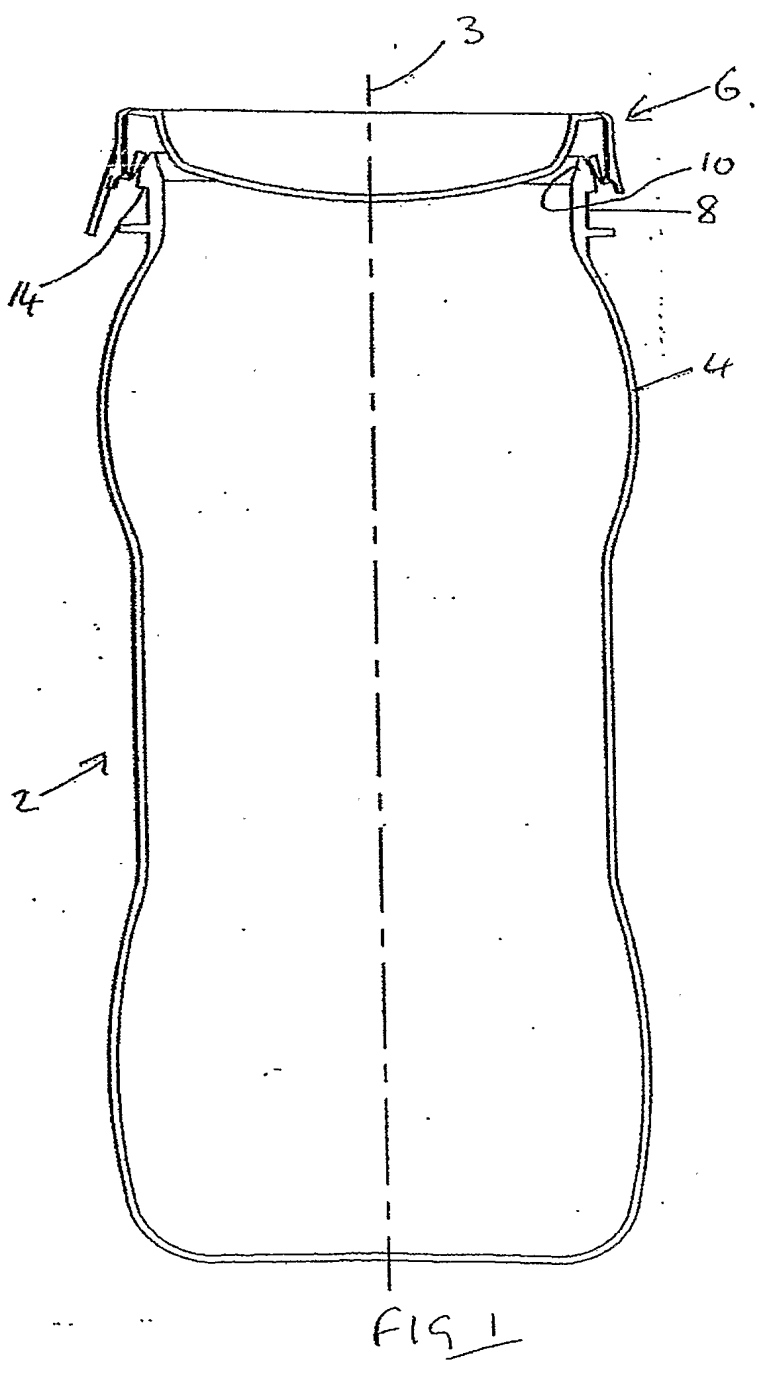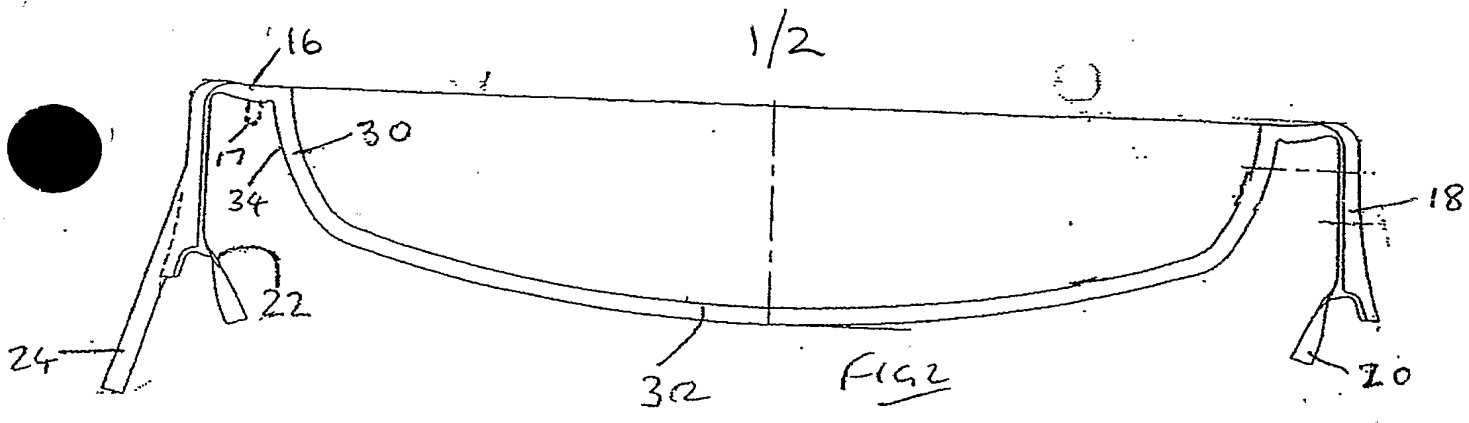



2/2

